


# SMARTBRIGHT SLIM PANEL

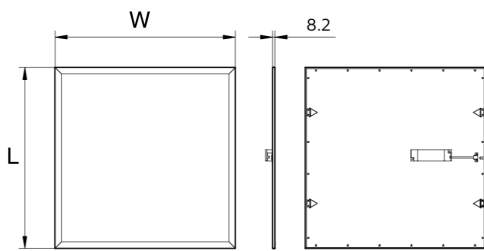

## Features

System efficacy 90 lm/W  
Recessed, plaster ceiling (PCV)  
Complete product family with multiple dimensions: 60 cm x 60 cm and 30 cm x 120 cm

## Application

Open office  
Meeting Room  
Hospital

## Model

Model	RC091V LED26S	RC091V LED36S
Size (L x W)	600mm x 600mm / 300 mm x 1200mm	600mm x 600mm / 300 mm x 1200mm
Nominal Power	29W	40W
System Flux	2,600lm	3,600lm

\* System lumen refers to typical lumen output of NW(4000K) product, it could result less lumen in WW(3000K) or higher lumen in CW(6500K).

## Specifications

Model	RC091V LED26S	RC091V LED36S
Input Voltage	220-240V, 50/60Hz	
Beam angle	120°	
Lifetime	25,000 hours	
CCT	4000K / 6500K	
Weight (kg)	2.4 kg / 2 kg	2.4 kg / 2 kg
IP Rating	IP20	
Power Factor	> 0.9	
Color Index	> 80	
Materials & Finishing	Aluminium extruded housing, white finished	
Operating Temp.	- 10 °C to + 35 °C	
Mounting Type	Recessed Mounting	
Standard	CE	

\* Actual order code refer to datasheets