


Streetlight Modular Series

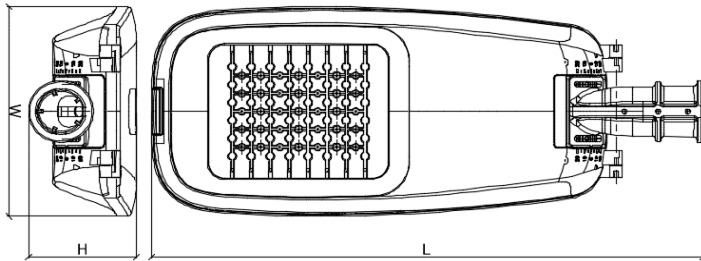

Features

- Input voltage 220 - 240V
- Aluminium Body
- Polycarbonate Diffuser
- Integrated LED Driver
- Lifetime 50,000 hours
- Wide wattage selection: 75, 90, 100, 120, 150, 180, 200W

Application

- Highways
- Open Car Park
- Residential Compound
- Pathway

Model

Model	SLG4yyy-xK	SLG4yyy-xK	SLG4yyy-xK
Size (L x W)	669mm x 250mm	741mm x 300mm	804mm x 357mm
Height (H)	145mm	145mm	145mm
Nominal Power	75 / 90 / 100W	120 / 150W	180 / 200W
System Flux	9,000 / 10,500 / 12,700lm	15,800 / 18,500 lm	24,000 / 26,000lm

Model Number: y refer to power rating, e.g. 75W (SLG4075-3000K)
 x refer to color temperature: 3000K (3K), 4000K (4K), 6500K (6K)

Specifications

Model	SLG4yyy-xK	SLG4yyy-xK	SLG4yyy-xK
Efficiency (lm/W)	120 - 130 lm/W		
Beam angle	Asymmetrical		
Lifetime	50,000 hours		
Weight (kg)	< 10		
IP Rating	IP66		
Power Factor	> 0.9		
Color Index	> 70		
THD	< 20		
Materials	Die-cast Aluminium		
Finishing	Grey		
Humidity	10 - 90 %		
Operating Temp.	- 20° C - 50° C		
Standard	IEC60598-1		