


ESSENTIAL SMARTBRIGHT WATERPROOF

WATERPROOF

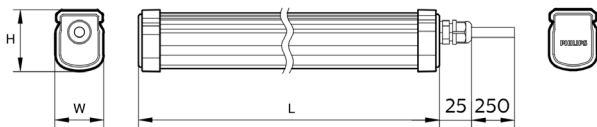

CE IP65

Features

Slim Design
Installation accessories included
20,000 hours lifetime

Application

Parking Area
Offices
Residential

Model

Model	WT035C LED15	WT035C LED30	WT035C LED37
Size (L x W x H)	598mm x 35.5mm x 44.5mm	1198mm x 35.5mm x 44.5mm	1498mm x 35.5mm x 44.5mm
Nominal Power	15W	30W	35W
System Flux	1,500lm	3,000lm	3,700lm

* System lumen refers to typical lumen output of NW(4000K) product, it could result less lumen in WW(3000K) or higher lumen in CW(6500K).

Specifications

Model	WT035C LED15	WT035C LED30	WT035C LED37
Input Voltage	220-240V, 50/60Hz		
Beam angle	120°		
Lifetime	20,000 hours		
CCT	4000K / 6500K		
Weight (kg)	0.25 kg	0.47 kg	0.53 kg
IP Rating	IP65		
Power Factor	> 0.9		
Color Index	> 80		
Materials & Finishing	Polycarbonate cover, White finishing, Steel reflector		
Operating Temp.	-20 °C to + 35 °C		
Mounting Type	Surface Mounting		
Standard	CE, RoHS		