


# SMARTBRIGHT WATERPROOF G2

WATERPROOF

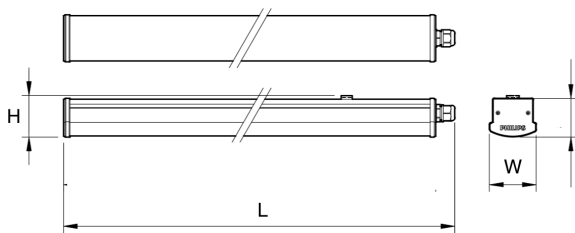

CE IP65

## Features

Robust design: IP65 IK06, Anti UV Polycarbonate housing, dual extrusion technology  
 Excellent Performance: good uniformity SDCM < 5  
 Reliable Quality: 25,000 hours with 70% lumen maintained

## Application

Car Park  
 Industrial Area  
 Canopy / Walkways

## Model

Model	WT066C-LED9	WT066C-LED18	WT066C-LED36	WT066C-LED45
Size (L x W x H)	626mm x 68mm x 60mm	626mm x 68mm x 60mm	1226mm x 68mm x 60mm	1526mm x 68mm x 60mm
Nominal Power	9.4W	19.4W	40W	49W
System Flux	900lm	1,800lm	3,600lm	4,500lm

\* System lumen refers to typical lumen output of NW(4000K) product, it could result less lumen in WW(3000K) or higher lumen in CW(6500K).

## Specifications

Model	WT066C-LED9	WT066C-LED18	WT066C-LED36	WT066C-LED45
Input Voltage	220-240V, 50/60Hz			
Beam angle	120°			
Lifetime	25,000 hours			
CCT	4000K / 6500K			
Weight (kg)	0.405 kg	0.41 kg / 0.8 kg	0.8 kg	0.98 kg
IP Rating	IP65			
Power Factor	> 0.9			
Color Index	> 80			
Materials & Finishing	Housing: Grey and White			
Operating Temp.	- 30 °C < Ta < + 45 °C			
Mounting Type	Stainless Universal Mounting Clip			
Standard	CE			